



Electric winch ATV







Optional accessories



Features

- » Suitable for pulling applications.
- » Only suitable for the recovery of vehicles or boats.
- » With free spooling function.
- » Permanently lubricated transmission, ensures smooth and quiet operation.
- » Supplied with control switch, power cable and steel cable with load hook.
- » The vehicle-battery must be powered by a constantly running engine.
- » Complies with the Machinery Directive 2006/42/EC. Supplied with test certificate, CE declaration of conformity and operating instructions.

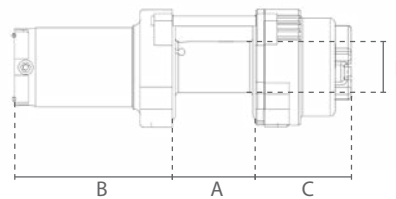

Specifications							
Article code	Capacity		Max. speed	Power output	Net weight	Energie verbruik	Netto gewicht
	1st layer ton	topmost layer ton	m	m/min	m x Ømm	kW	kg
ZH.0.ATV.3000.12	1,360	0,760	8	2,1	10 x 5,5	1	7,5

Specifications	
Application	Recovery winch
Operating voltage	12V
Speed	Single speed
Cable	Steel cable
Control cable	1 meter
Power cable	1 meter with battery connectors
Housing protection	IP 67
Control protection	IP 65
Operating temperature	-20°C - +85°C

Protection	
Overload protection	No overload protection
Brake	Mechanical brake
Limit switch	No limit switch

Dimensions (mm)											
Article code	A	B	C	D	E	F	J	K	L	M	N
ZH.0.ATV.3000.12	83	161	95	120	114	50	29	23	76	124	8,3